




**Pressure Relief Valve**  
**KITO® DS/o cont. 25**



Design A

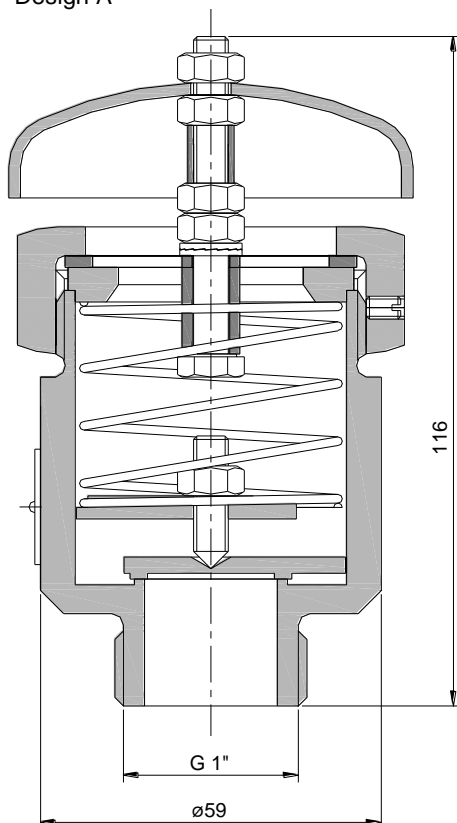

Design B

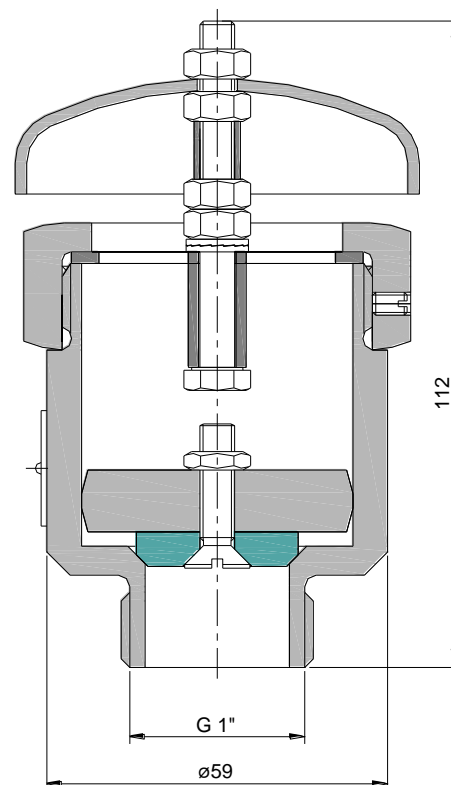

**Without EC certificate and CE -designation**

Weight ~ 1,0 kg.

Dimensions in mm

Design subject to change

Standard design

housing : stainless steel mat. no. 1.4571  
 cap : stainless steel mat. no. 1.4301  
 threaded connection : G 1"

**Design A**

valve pallet : stainless steel mat. no. 1.4571  
 compression spring : stainless steel mat. no. 1.4571  
 set pressure : > 25 - 210 mbar pressure

**Design B**

valve pallet : stainless steel mat. no. 1.4571  
 sealing : PTFE  
 set pressure : 10 - 20 mbar pressure

Application

Pressure relief valve for portable tanks for the transport of non-flammable liquids.  
 To prevent inadmissible tank pressure by warming or filling.

Not explosion proof.

performance curves : M 0.2 N

